

JOBBER LM

ACE
DESIGNERS

AceMicromatic
Group Company



HORIZONTAL TURNING CENTER

Machine Features

- Powerful AC Spindle motor
- High speed 4000 rpm spindle
- Thermally stabilised spindle
- Linear motion guide ways
- 30 m/min rapid traverse rate
- Pre-tension ball screw support
- 0.45 sec. turret Index time
- 100% ball bar tested
- Separate coolant tank-easy maintenance

Standard Accessories

- AC spindle & axes drives
- Precision linear motion guides on both axes
- Heavy duty bi-directional turret
- Tailstock with live center
- Automatic centralized oil lubrication
- Hydraulic power operated chuck (Ø200 mm)
- Programmable quill
- 3 tier lamp
- Rigid tapping
- Drain line oil cooler
- Basic hydraulic system
- OD tool holder clamping block (8 nos)
- Boring bar holder (4 nos)
- Facing tool holder (2 nos)
- Set of sleeves

Optional Accessories

- Hydraulic power operated Chuck (Ø165 mm)
- Voltage stabilizer - 15 kVA
- Chip conveyor rear/side
- TPM - Trak productivity monitoring system
- LASER calibrated axes

LM - Linear motion guideways

THINK Turning®
Ace Designers

THE LARGEST MACHINE TOOL GROUP IN INDIA

Follow us on :



Ace Designers



@acedesignersblr




@acedesigners




www.acementromatic.net


Machining Range

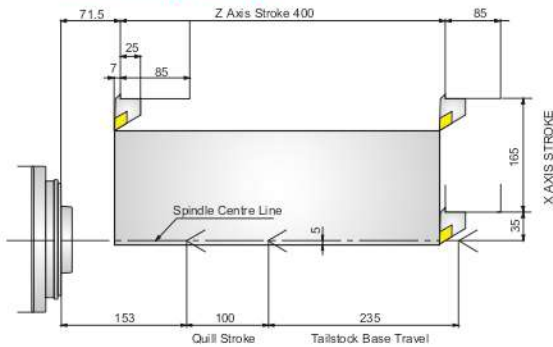


Interference Diagram

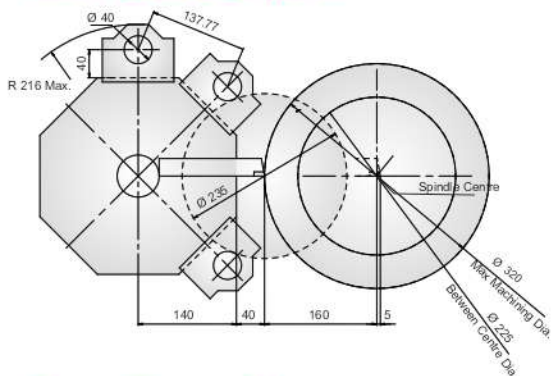

Power Torque Diagram

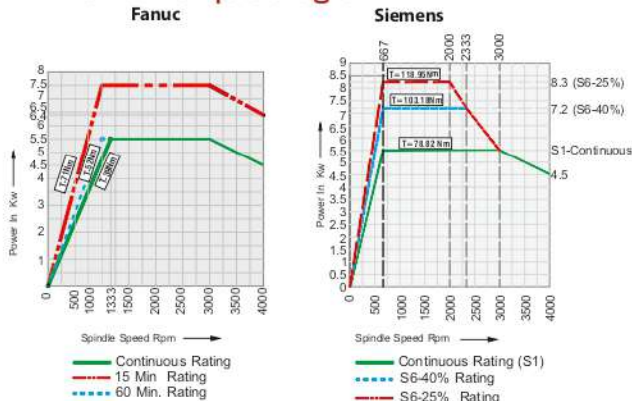

Overall Views

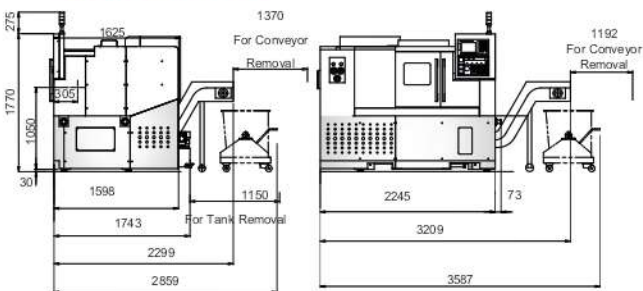

All dimensions are in mm

Manufactured by:

Ace Designers Ltd.

Plant I - Plot No.7 & 8, II Phase, Peenya Industrial Area, Bangalore - 560 058, India

Tel : +91-80-2218 6700, Fax : +91-80-2218 6723, E-mail : info@acedesigners.co.in, CIN: U29199KA1986PLC007816

INDIA-Marketed & Serviced by **Micromatic**

Ahmedabad +91 7925471145; Ambattur +91 98407 85521; Aurangabad +91 240 2552309; Bangalore +91 80 40200555; Belgaum +91 99800 02597; Bommasandra +91 80 27834836; Chakan +91 2135 322002; Chennai +91 44 40440700; Coimbatore +91 422 4506183, 6588595; Delhi +91 11 22414232/ 42448095; Faridabad +91 129 4047000; Gurgaon +91 124 4745500 / 4745500; Hyderabad +91 40 23070496; Indore +91 73899 39190, 73899 39191; Jamshedpur +91 657 6539931; Kolhapur +91 230 2460444, 2460123; Kolkata +91 33 26710158 / 2710100 / 033-64578825; Ludhiana +91 97791 28296; Mumbai +91 22 26861009/1976/7271/7272; Nasik +91 253 6610254; Pune +91 20 40712111/27479661/9662; Rajkot +91 7698000728; Ranipet +91 4172 272732; Rohtak +91 8295043311; Rudrapur +91 95570 30224, +91 97201 06532; Tambaram +91 44 22265531; Thane +91 22 25829062; Trichy +91 431 2443066; Chandigarh +91 99141 91057; Bhiwadi +91 99581 09777

INTERNATIONAL

Germany +49 (0) 172 231 6688; Shanghai +86 (21) 586 650 31/32; Switzerland +41 32 652 58 41

Email: salesmmt@acemicromatic.com

Specifications

Jobber LM

Control System	Fanuc/Siemens
Capacity	
Swing Over Bed	500 mm
Distance Between Centers	425mm
Maximum Turning Dia	320 mm
Between Centre Turning Dia	225 mm
Maximum Turning Length	400* mm
Spindle	
Spindle Nose	A2-5
Bore Through Spindle	52.5 mm
Front Bearing Bore	80 mm
Maximum Bar Capacity	42 mm
Maximum Spindle speed	4000 rpm
Spindle Motor Power (Fanuc - 15 min. Rating)	Fanuc-7.5 kW
(Siemens - S2-25%)	Siemens - 8.3 kW
(Siemens - S6 - 40%)	Siemens - 7.2 kW
Spindle Motor Power (Continuous Rating)	Fanuc - 5.5 / Siemens - 5.5 kW
Full Power Range	Fanuc 1333 - 3000 rpm Siemens 667 - 3000 rpm
Standard Chuck Size	200 mm
Axes	
Type of Guideways	Linear motion Guideways
X-Axis Stroke	165 mm
Z-Axis Stroke	400 mm
X & Z Axes Rapid Rate	30 m/min.
Tooling	
Number of Tools Maximum	8
Boring Bar Dia Maximum	40 mm
OD Turning Tool Size	25 x 25 mm
Tailstock	
Tailstock Base Travel	235 mm
Tailstock Quill Travel	100 mm
Tailstock Quill Dia.	80 mm
Quill Taper	MT-4
Hydraulic System	
Hydraulic Pump Capacity	14 lpm
Hydraulic Power Pack	45 litre
Tank Capacity	
System Pressure	30 Kg/cm ²
Coolant Tank Capacity	110 litre
Overall Machine Dimensions (L x W x H)	2320 x 1750 x 1770 mm
Overall Weight (Without Packing)	~ 3500 kg

* With appropriate work holding

Owing to continuous up-gradation of our products, the specification may change and to be reconfirmed at the time of ordering. Features shown may not be part of the standard equipment.

